


BIGLOADS

HOW TO LOAD A DUMP TRAILER

Quick renter reference - bumper-pull dump trailer

LOAD POSITION - QUICK VISUAL

DENSE MATERIAL
LOW + CENTERED

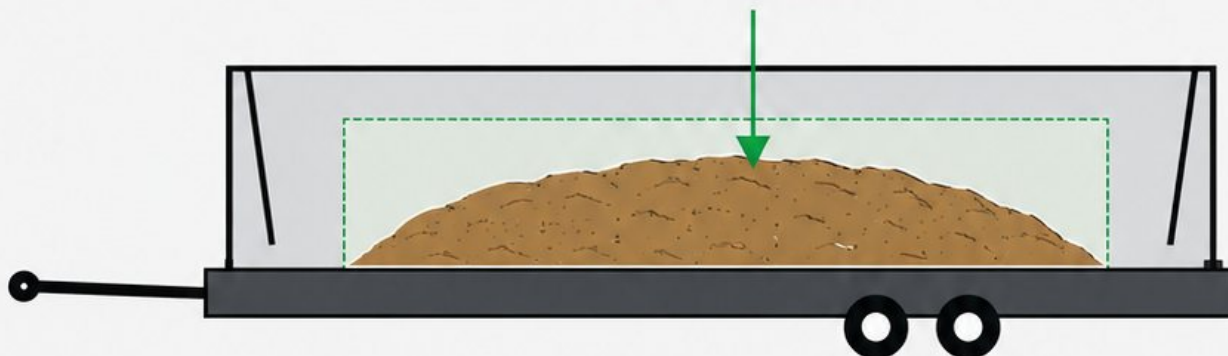

1

CHECK MATERIAL WEIGHT

Dirt, rock, concrete, and wet material get heavy fast. Know the approximate material weight before loading.

2

LOAD LOW AND CENTERED

Spread material evenly across the floor with dense weight centered and slightly forward of the axle group. Avoid a heavy pile at the tailgate.

3

STAY LEVEL WHILE TOWING

An overloaded or tail-heavy dump trailer can sway, overload tires/axles, and reduce tow-vehicle control.

4

DUMP ON FIRM LEVEL GROUND

Keep the tow vehicle and trailer straight. Clear people and obstacles from the dump zone and follow the trailer operating instructions.

THIS TRAILER

GVWR:

Payload:

Max material wt.:

Owner phone:

STOP - BEFORE YOU TOW

- | | |
|--|---|
| ☒ Coupler/chains secure | ☒ Tire condition checked |
| ☒ Gate latched for travel | ☒ Load under payload |
| ☒ Tarp or load secured if needed | ☒ People clear before dumping |

General renter reference only. Follow the trailer manufacturer labels/manual, tow vehicle limits, hitch ratings, tire ratings, and all applicable load securement laws. Never exceed GVWR or GAWR. Never raise the dump body on unsafe, soft, or severely sloped ground. Follow the manufacturer instructions for gate position, hydraulic operation, and dump procedure.