


HOW TO LOAD A UTILITY TRAILER

Quick renter reference - open utility trailer

LOAD POSITION - QUICK VISUAL

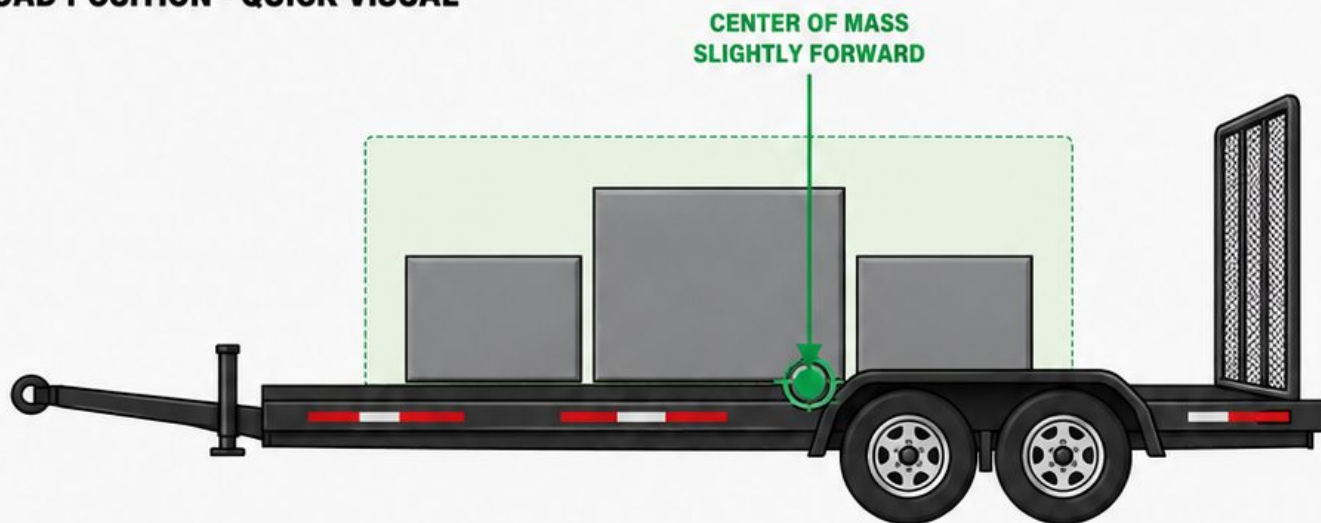

1 KNOW YOUR PAYLOAD

Subtract the empty trailer weight from GVWR and stay under the lower of trailer, axle, tire, hitch, and tow-vehicle limits.

2 KEEP WEIGHT FORWARD

Place the combined center of mass slightly ahead of the axle group. Avoid heavy items stacked at the rear gate.

3 BALANCE SIDE-TO-SIDE

Spread cargo evenly across the deck. Put dense items low, centered, and directly supported by the floor.

4 TIE DOWN EVERYTHING

Use rated straps or chains to solid anchor points. Secure loose tools, ramps, gates, and small items that could bounce out.

THIS TRAILER

GVWR:

Payload:

Max tongue wt.:

Owner phone:

STOP - BEFORE YOU TOW



Coupler latched



Chains attached



Gate/ramp pinned



Lights working



Cargo tied down



Tires visually checked

General renter reference only. Follow the trailer manufacturer labels/manual, tow vehicle limits, hitch ratings, tire ratings, and all applicable load securement laws. Never exceed GVWR or GAWR. Load position should create stable positive tongue weight without exceeding hitch/tow-vehicle ratings.