


HOW TO LOAD AN ENCLOSED CARGO TRAILER

Quick renter reference - enclosed trailer

LOAD POSITION - QUICK VISUAL

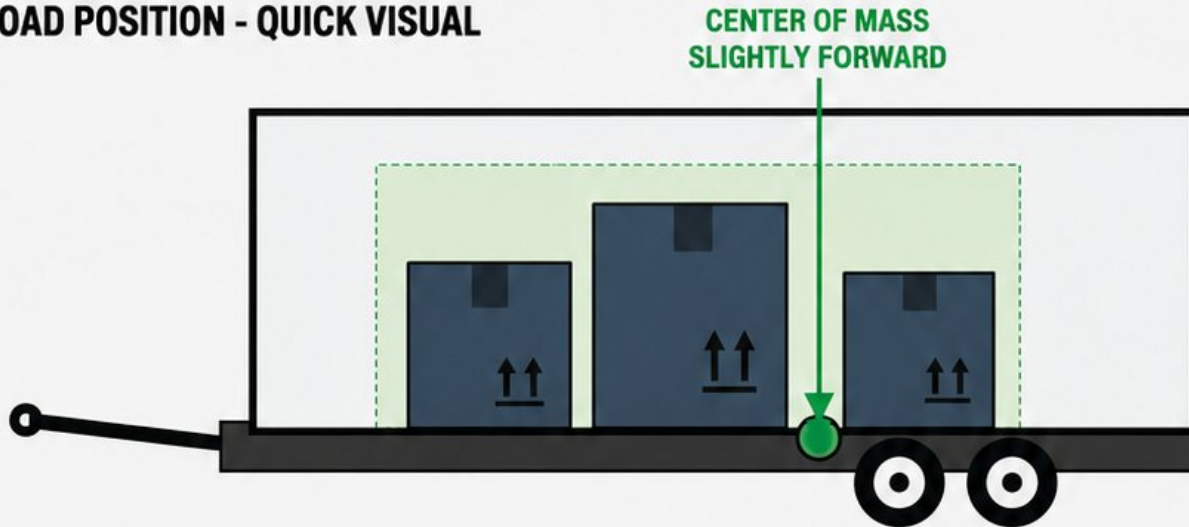

1 PLAN BEFORE LOADING

Put the heaviest items in first so you can place them low, centered, and slightly ahead of the axle group.

2 DO NOT MAKE IT TAIL-HEAVY

Light bulky items can go toward the rear. Dense, low items should be forward. Do not let cargo sit behind the axles.

3 SECURE INSIDE THE TRAILER

Walls are not tie-downs. Use rated floor/wall anchors and keep cargo from shifting forward, backward, or sideways.

4 RESPECT HEIGHT AND CLEARANCE

Check door height, roof clearance, interior fixtures, and total trailer height before entering garages, canopies, or drive-throughs.

THIS TRAILER GVWR: _____ Payload: _____ Interior height: _____ Owner phone: _____

STOP - BEFORE YOU TOW

- ☒ Coupler/chains secure
- ☒ Doors latched/locked
- ☒ Cargo tied off
- ☒ Lights/brakes working
- ☒ Jack fully raised
- ☒ Roof clearance known

General renter reference only. Follow the trailer manufacturer labels/manual, tow vehicle limits, hitch ratings, tie-down laws, and all applicable load securement laws. Never exceed GVWR or GAWR. Interior wall panels may not be structural tie-down points. Use only rated anchors and follow safe loading practices.